




INSTANTLOCK 2 METAL BOARDS

PART #	DESCRIPTION	WIDTH (INCHES)	WEIGHT (LBS.)	UNIFORM LOAD (LBS./FT.)	CENTER LOAD (LBS.)
SP24	2' Plank	9	11.5	271	600
SP36	3' Plank	9	16	271	600
SP42	3.5' Plank	9	18	232	546
SP48	4' Plank	9	18.8	213	520
SP60	5' Plank	9	23.5	185	480
SP72	6' Plank	9	28.5	105	388
SP84	7' Plank	9	30.5	100	322
SP96	8' Plank	9	37.5	93	284
SP108	9' Plank	9	41.5	69	250
SP120	10' Plank	9	46.5	58	233
6SP24	6" x 2' Plank	6	10.5	271	600
6SP36	6" x 3' Plank	6	12.9	271	600
6SP42	6" x 3.5' Plank	6	14.5	232	546
6SP48	6" x 4' Plank	6	16.1	213	520
6SP60	6" x 5' Plank	6	19.4	185	480
6SP72	6" x 6' Plank	6	22.6	105	388
6SP84	6" x 7' Plank	6	25.9	100	322
6SP96	6" x 8' Plank	6	27.7	93	284
6SP108	6" x 9' Plank	6	32.4	69	250
6SP120	6" x 10' Plank	6	35.6	58	233

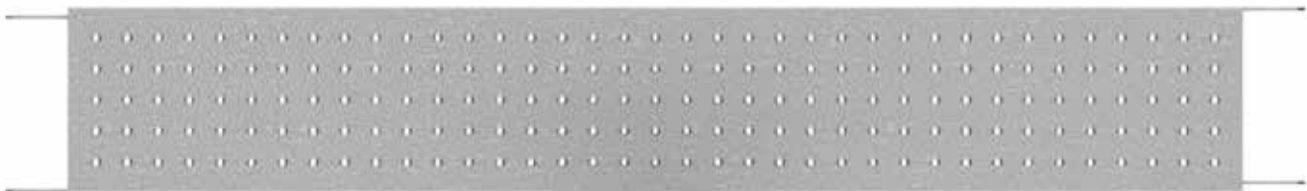

SIDE PROFILE



LOCKING MECHANISM



BUILD NOTE:

Where a possibility of uplift could occur, all boards should be securely attached to the scaffold with #9 wire, tie wraps, toe boards, filler plates or other equivalent means.

All material must be inspected prior to use! See inspection guidelines on page 87.