




INSTANTLOCK 2 ALUMINUM LADDER

PART #	DESCRIPTION	OVERALL LENGTH (INCHES)	MAX. TOTAL VERTICAL LOAD ON LADDER	MAX. LOAD ON ONE (1) LADDER RUNG	WEIGHT GALVANIZED (LBS.)
ALA10	10' Aluminum Ladder	120	1,000	500	24
ALA5	5' Aluminum Ladder	60	1,500	500	12
ALA3	3' Aluminum Ladder	36	2,000	500	7
8-ALA10	8" wide 10' Aluminum Ladder	120	1,000	500	22
8-ALA5	8" wide 5' Aluminum Ladder	60	1,500	500	11
8-ALA3	8" wide 3' Aluminum Ladder	36	2,000	500	6.5
AEP	Expansion Pin	7.5	NA	NA	2.5

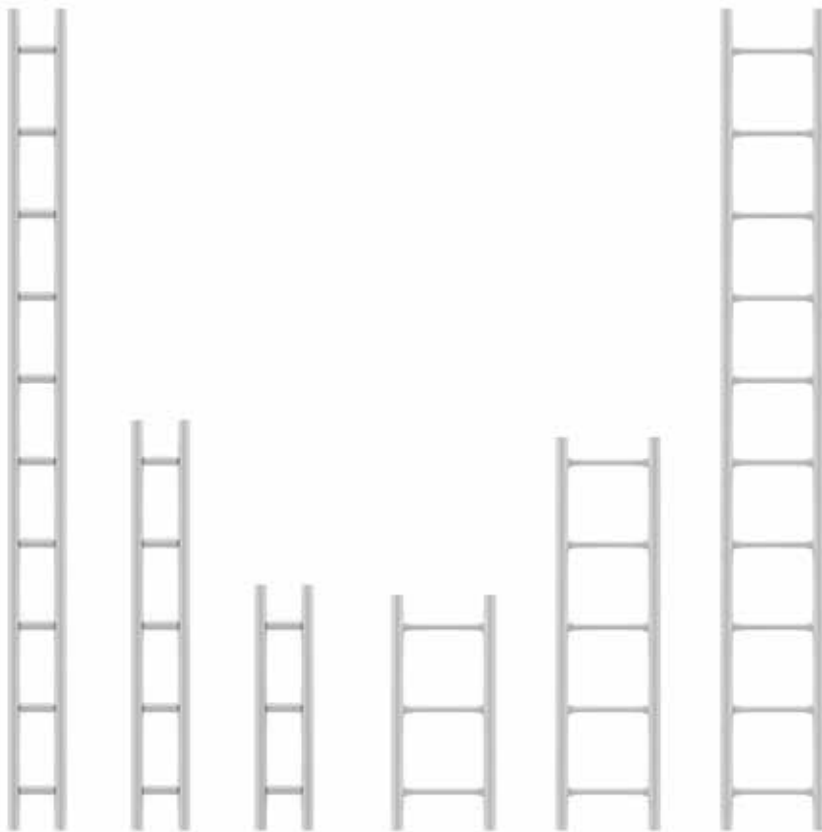

EXPANSION PIN

BUILD NOTE:

When installing aluminum ladders, the expansion pin should always be securely tightened.



Expansion pin bolts should have between 40 and 65 lbs. tension. Overtightening could damage the threads, bolt or ladders the expansion pin is attached to.

All material must be inspected prior to use! See inspection guidelines on page 87.