




INSTANTLOCK 2 CASTER

PART #	DESCRIPTION	WHEEL TYPE	WEIGHT (LBS.)	ALLOWABLE ROLLING LOAD (LBS.)
CR8	8" Caster with pin	Plastic	17	900
CRF8	8" Caster flat base	Plastic	17.5	900
CR12	12" Caster	Plastic	23	1,300

Third-party manufactured components. Data may vary.

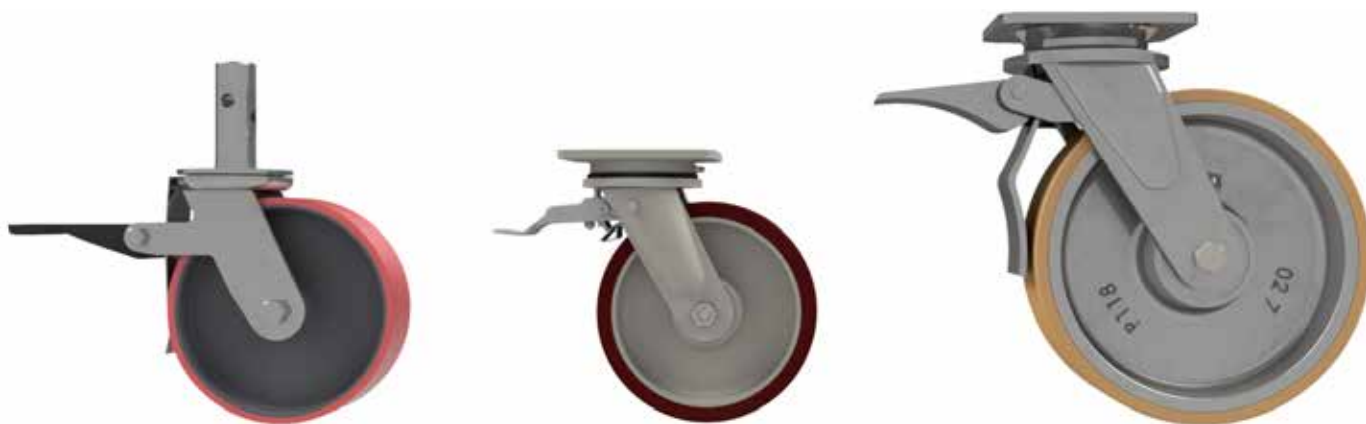

BUILD NOTES:

1. Casters must be locked while working on the scaffold.
2. Check the weight of the scaffold and intended load when using casters.
3. To maintain a 4:1 safety factor, a scaffold 15 feet high with two (2) board decks is the largest scaffold that should be built with 8-inch casters. A scaffold 21 feet high with three (3) board decks is the largest scaffold that should be built with 12-inch casters. For heights greater than 21 feet, contact your engineer.

MAINTENANCE:

1. Casters should be periodically maintained. If they have grease fittings, they should be filled with a white lithium grease (ST-80 High-Performance Grease or its equivalent).
2. WD-40 can be used before application of grease or oil to loosen old grease and remove any rust buildup.
3. The caster bearings must be inspected for any wear or damage. Replace any casters that show signs of wear or damage.



All material must be inspected prior to use! See inspection guidelines on page 87.