




INSTANTLOCK 2 LADDER

PART #	DESCRIPTION	OVERALL LENGTH (INCHES)	MAX. TOTAL VERTICAL LOAD ON LADDER (LBS.)	MAX. LOAD ON ONE (1) LADDER RUNG (LBS.)	WEIGHT GALVANIZED (LBS.)
LA10	10' ladder	118	1,000	500	42
LA9	9' ladder	106.5	1,000	500	36
LA8	8' ladder	95	1,000	500	34
LA7	7' ladder	83.5	1,000	500	32.1
LA5	5' ladder	60.5	1,500	500	22.2
LA4	4' ladder	49	1,500	500	18.3
LA3	3' ladder	37.5	2,000	500	14.3
LA2	2' ladder	26	2,000	500	8
LA1	1' ladder	14.5	2,000	500	4.1

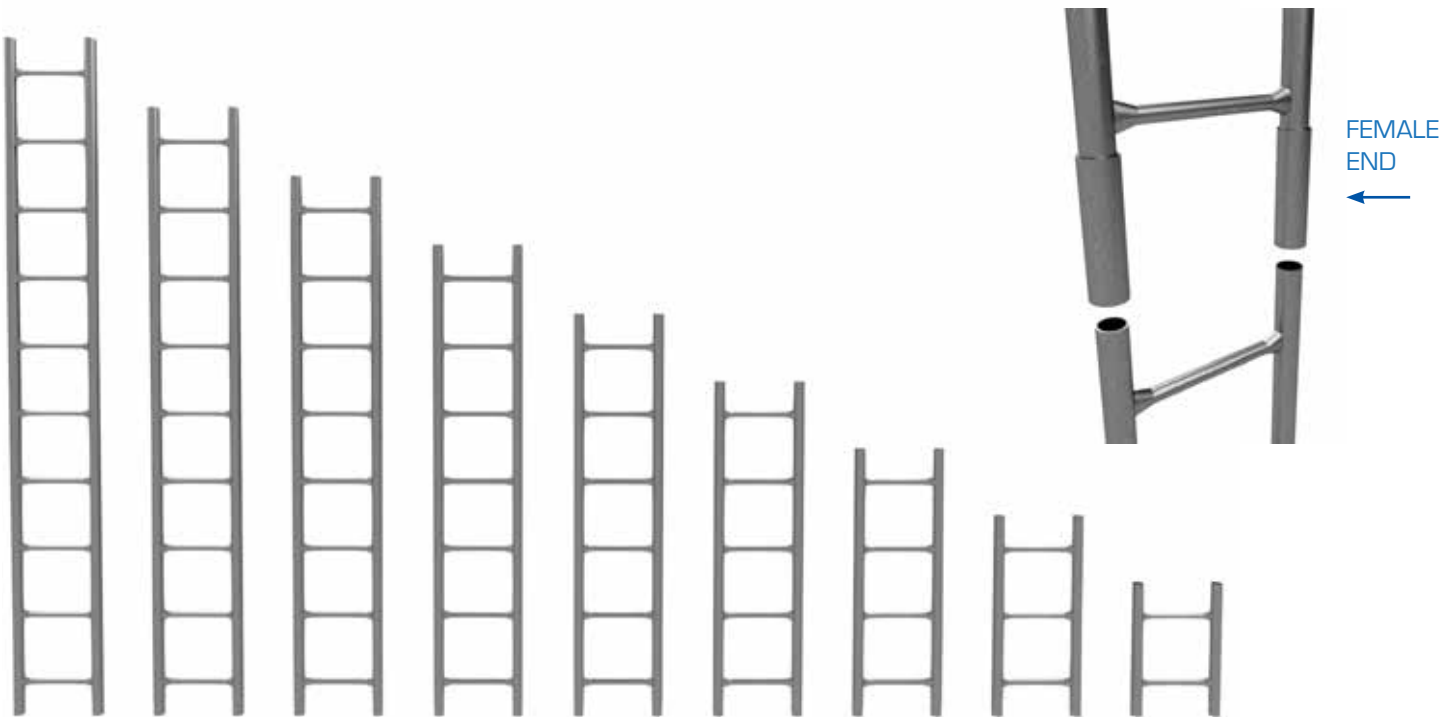

BUILD NOTES:

1. When installing ladders, the female end should always be placed at the bottom to prevent debris from collecting in the end of the ladder.
2. Ladders are not designed to support loads, such as walkways, pipe supports, pipe hangers, lifting rigs, etc.
3. Ladders should only be used for access to scaffolds.
4. The ladder brackets may limit the load carrying ability of the ladder.

All material must be inspected prior to use! See inspection guidelines on page 87.