


INSTANTLOCK 2 EQUIPMENT CARTS



PART #	DESCRIPTION	WIDTH (INCHES)	HEIGHT (INCHES)	LENGTH (INCHES)	LOAD CAPACITY (LBS.)	WEIGHT (LBS.)
S-Cart	Scaffold Cart	45.25	38.5	72	3,340	300
TS-Cart	Towable Scaffold Buggy	52	48	132	2,000	480



SCAFFOLD CART

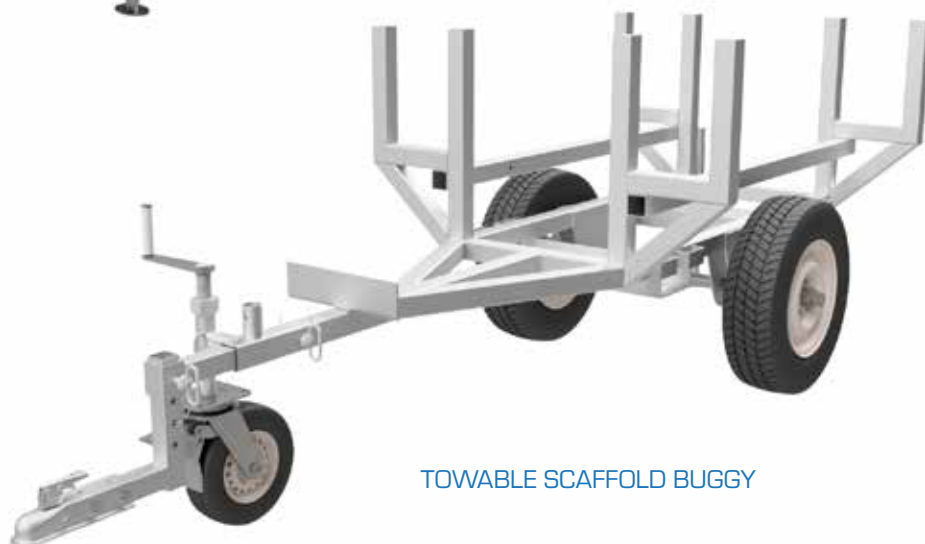

TOWABLE SCAFFOLD BUGGY

BUILD NOTES:

1. Scaffold cart is only to be lifted by a forklift at pockets provided and all material strapped into place prior to lifting.
2. Only the towable scaffold buggy is meant to be towed by a motorized vehicle. Scaffold cart is to be pushed by man power.
3. Cart wheels are to be locked while loading and unloading to prevent movement.
4. The stabilizer at the back of the scaffold cart and buggy is to be used whenever the cart is stationary.

All material must be inspected prior to use! See inspection guidelines on page 87.